



IGNITE THE POWER OF NATURE

Monocrystalline Module --small size 10Watt

Model (RD10TU-18MD) Specifications


Electrical Data

Maximum Power(W)	10W
Optimum Power Voltage(Vmp)	18.57V
Optimum Operating Current(Imp)	0.54A
Open Circuit Voltage(Voc)	22.64V
Short Circuit Current(Isc)	0.58A
Cell Efficiency	17.96%
Module Efficiency	10.83%
Tolerance Wattage	0~+3%
NOCT	47°C +/-2°C



Benefits

- High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;
- Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;
- Modules independently tested to ensure conformance with certification and regulatory standards;
- Manufacturing facility certified to ISO 9001 quality management system standards.

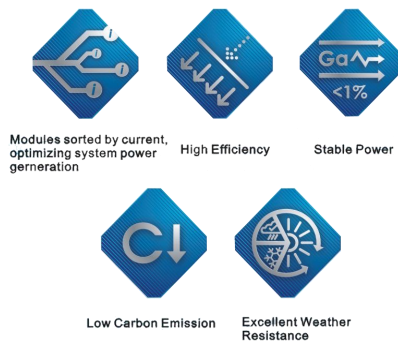

Applications

- On-grid residential roof-tops
- On-grid commercial/industrial roof-tops
- Solar power stations
- Other on-grid applications

Temperature Coefficients

Temperature Coefficients of Isc(%) $^{\circ}$ C	+0.04
Temperature Coefficients of Voc(%) $^{\circ}$ C	-0.38
Temperature Coefficients of Pm(%) $^{\circ}$ C	-0.47
Temperature Coefficients of Im(%) $^{\circ}$ C	+0.04
Temperature Coefficients of Vm(%) $^{\circ}$ C	-0.38



IGNITE THE POWER OF NATURE

Monocrystalline Module --small size 10Watt

Components & Mechanical

Solar Cell	52*30.6(32.1)	Mono
Number of Cell(pcs)	4*9	
Size of Module(mm)	260*355*18	
Front Glass Thikness(mm)	3.2	
Surface Maximum Load Capacity	2400-5400Pa	
Allowable Hail Load	23m/s ,7.53g	
Weight Per Piece(KG)	1.2	
Frame(Material Corners,etc.)	18#	
Temperature Range	-40°C to +85°C	
FF (%)	70-76%	
Standard Test Conditions	AM1.5 1000W/m ² 25°C	


Packing

Packing	Wooden Box
Pieces per container	140pcs/Pallets

Project Picture



Engineering Drawings

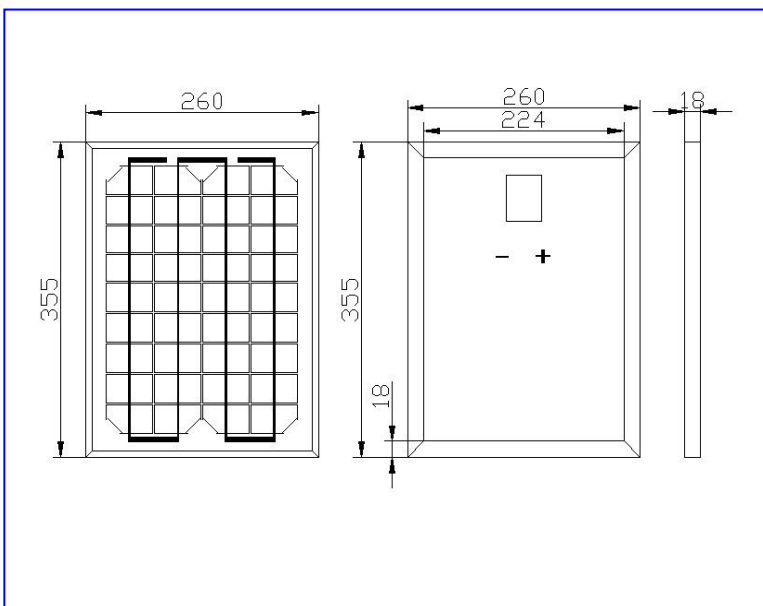

NINGBO RENELED NEW ENERGY CO.,LTD.

Add:No.35 Jintong Road,Binhai Industrial Park

Xiangshan,Zhejiang ,China

Tel:+86-574-65893072

Fax:+86-574-65786317

©2016 NINGBO RENELED NEW ENERGY CO.,LTD. All rights reserved.

Specifications included in this datasheet are subject to change without notice.

