



ZY700G12NHB-132



Bifacial Double Glass Mono-crystalline Solar PV Modules

700
Watts


Efficient photovoltaic modules

12
years

product warranty

30
years


Limited power warranty of 87.4% of the minimum specified power rating

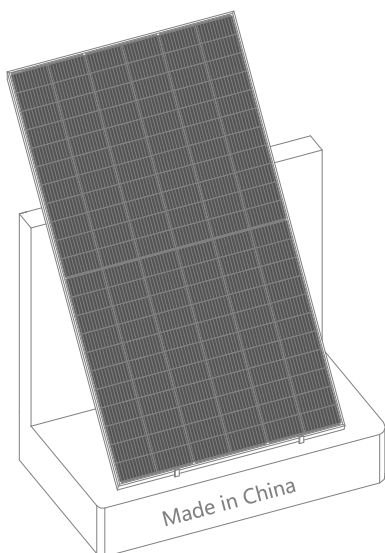

Dimensions of PV Module(mm):

Dimensions: 2384*1303*35mm

Weight: 38.6 kg(±3%)

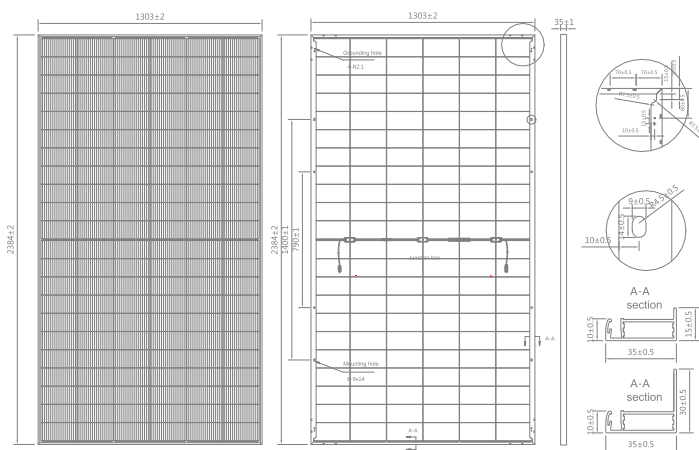

Electrical specifications:

Module Type:	ZY700G12NHB-132	
Nominal Peak Power:(Pmax)STC/NMOT±3% (W):	700	523.6
Max.Power Voltage:(Vmp)STC/NMOT (V):	40.61	37.70
Max.Power Current:(Imp)STC/NMOT (A):	17.24	13.89
Open-circuit Voltage:(Voc)STC/NMOT±3% (V):	48.53	44.94
Short-circuit Current:(Isc)STC/NMOT±3% (A):	18.09	14.63
Module Efficiency:(nm)	(%)	22.5
Power Selection (W):	0~+5	
Operating Temperature: (°C):	-40~+85	
Max. Series Fuse Rating: (A):	35	
Max. System voltage:(DC) (V):	1500	

STC: irradianc 1000 W/m², module temperature 25°C, AM1.5;

NMOT: irradianc 800 W/m², module temperature 20°C, AM 1.5, wind speed 1 m/s.

Mechanical Specifications

Solar Cell:	N-Mono-210*105
Arrangement:	Type-6*11*2
Glass thickness:	2.0+2.0mm tempered glass
Frame:	Anodized aluminium alloy
Junction Box:	IP68, 3 diodes
Cables& Connectors:	4.0mm²&PV-CXLH0601
Manufacturer of connector&Junction Box	Ningbo Lihui photovoltaic Technology Co., Ltd
Maximum Load Capacity	5400Pa/2400Pa
Bifacial	75±5%
Fire Rate	Class C (TUV)


Temperature characteristics

Temperature Coefficient (Pmax):	-0.30 %/°C
Temperature Coefficient (Voc):	-0.25 %/°C
Temperature Coefficient (Isc):	+0.05 %/°C
Normal Operating Cell Temperature:	45±2 °C

Electrical characteristics:


Current-Voltage Characteristic(I-V Curve)

PV module: Renepv, ZY700G12NHB-132

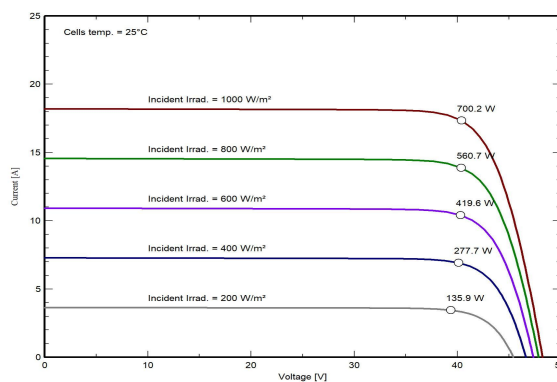

Power-Voltage Characteristic(P-V Curve)

PV module: Renepv, ZY700G12NHB-132

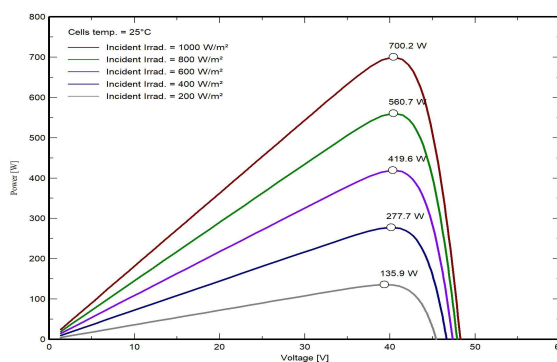

Packing Configuration

40'HQ Container: 31pcs/pallet 18pallet/40'HQ 558pcs

TUV/IEC61215/61730 Quality / ISO Certified Company



@NINGBO ZHONGYI NEW ENERGY CO., LTD.

Address : No.509 Zhengtong North Road,CixiCity hi-tech Industrial development zone,Zhejiang,China

Tell: +86-0574-63097968

Fax: +86-0574-63097968

Email: info@renepv.com

<https://www.renepv.com>